


DehuTech 19000 Dehumidifier

Desiccant dehumidifier for drying of air at all conditions but especially suitable for low temperature and low humidity operation. Complete self-contained unit including desiccant rotor, fan, filters, electrical reactivation heater and controls.

Options

Steam or gas reactivation heater
Left hand service side


The unit is ready for connection to standard size duct works, electrical power (steam or gas) supply and external humidity sensor.

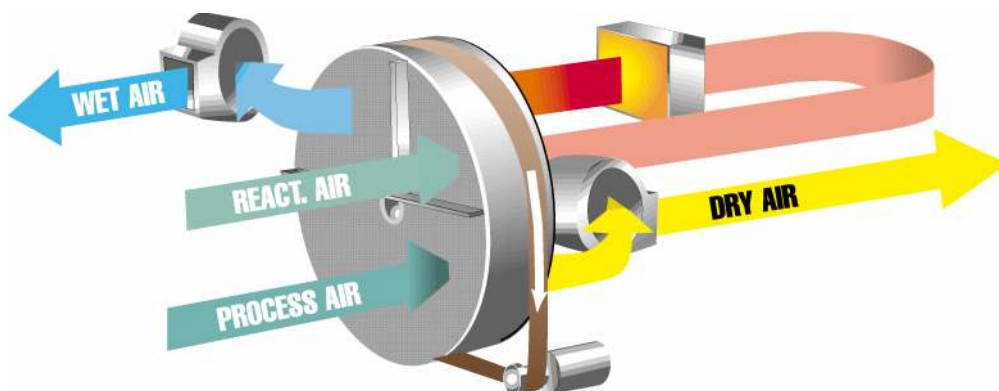


Calorex DehuTech 19000

TECHNICAL DATA

		Electrical power supply	207 kW
		Electrical reactivation (3 × 400V, 50Hz)	
Dehumidification capacity (at +20°C and 60%RH see capacity diagram for other data)	120 kg/h	Electrical power supply	15 kW
		Steam/gas reactivation (3 × 400V, 50Hz)	
Dry air flow (at 440 Pa available external pressure)	19000 m ³ /h	Weight	1700 kg
Wet air flow (at 450 Pa available external pressure)	6000 m ³ /h	Max noise level	72 dB(A)

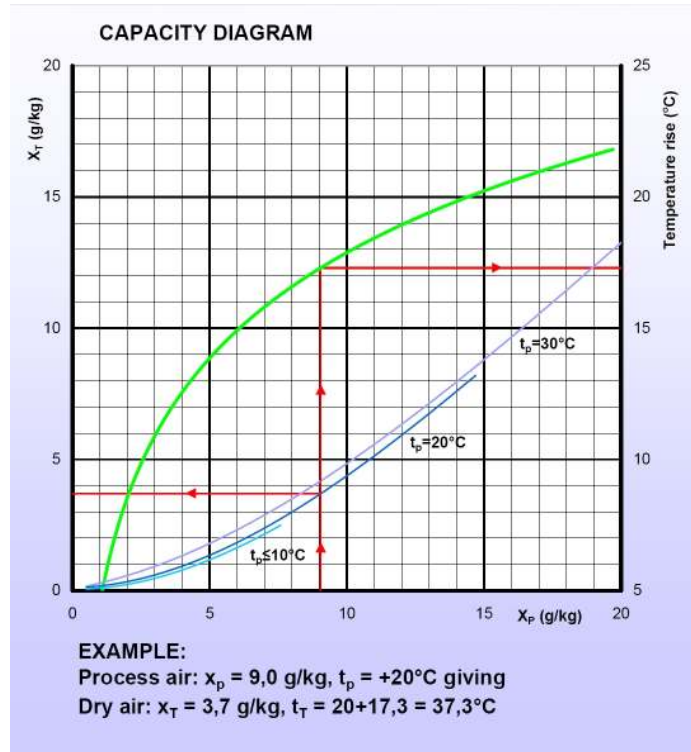

DIMENSIONS

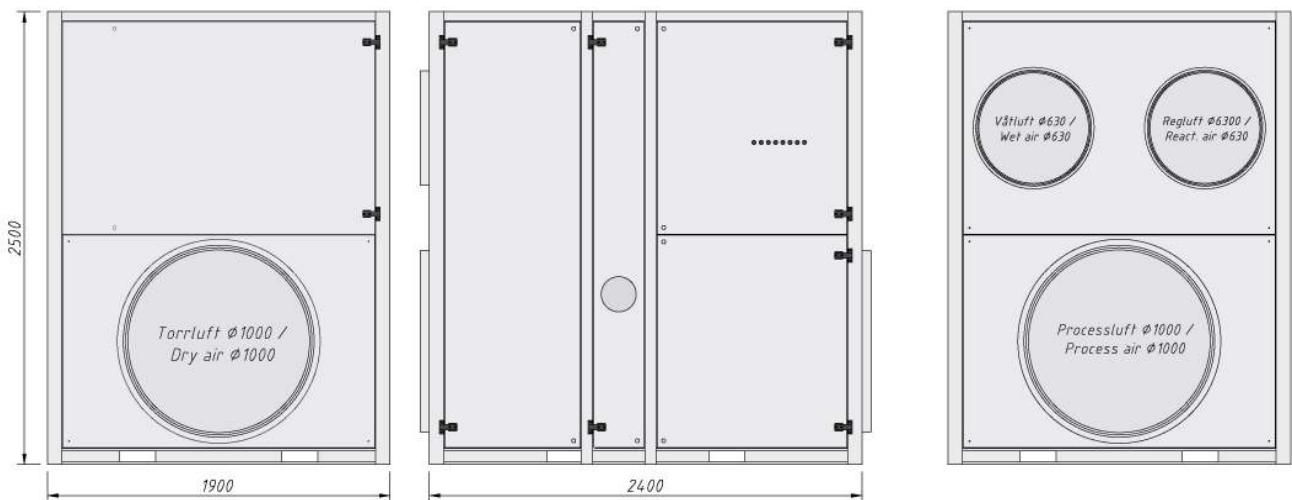

Calorex Heat Pumps Limited
 The Causeway, Maldon, Essex, CM9 5PU
 Tel: +44 (0)1621 856611 Fax: +44 (0)1621 850871
 Email: sales@calorex.com Web: www.calorex.com