


DehuTech 13000 Dehumidifier

Desiccant dehumidifier for drying of air at all conditions but especially suitable for low temperature and low humidity operation. Complete self-contained unit including desiccant rotor, fan, filters, electrical reactivation heater and controls.

Options

Steam or gas reactivation heater
Left hand service side

The unit is ready for connection to standard size duct works, electrical power (steam or gas) supply and external humidity sensor.

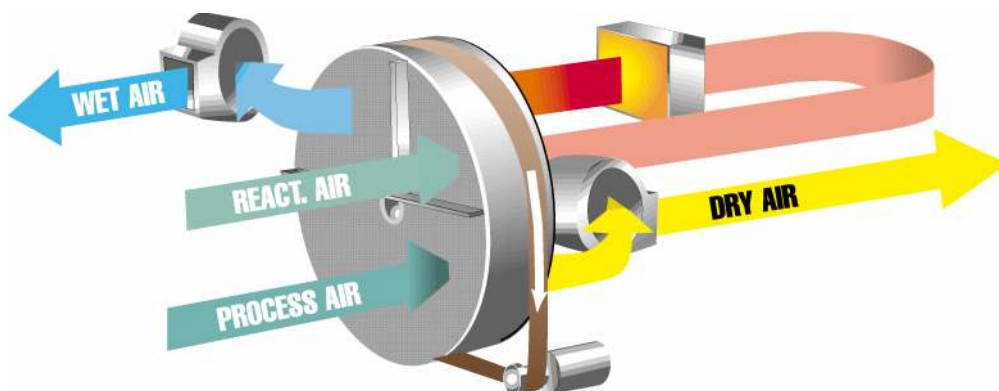


For further information call: Calorex Heat Pumps, The Causeway, Maldon, CM9 5PU
Telephone: +44 (0) 1621 856611 Fax: +44 (0) 1621 850871
Email: sales@calorex.com Web: www.calorex.com


Calorex DehuTech 13000

TECHNICAL DATA

| | | | |
|--|-------------------------|---|----------|
| Dehumidification capacity (at +20°C and 60%RH see capacity diagram for other data) | 86 kg/h | Electrical power supply Electrical reactivation (3 × 400V, 50Hz) | 143.5 kW |
| Dry air flow (at 590 Pa available external pressure) | 13000 m ³ /h | Electrical power supply Steam/gas reactivation (3 × 400V, 50Hz) | 11.5 kW |
| Wet air flow (at 200 Pa available external pressure) | 4200 m ³ /h | Weight | 1350 kg |

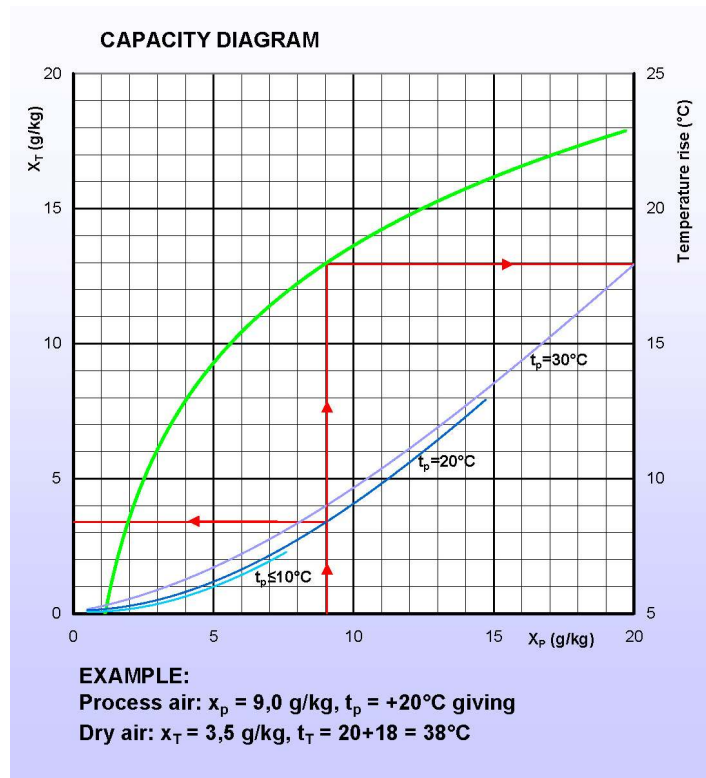

DIMENSIONS

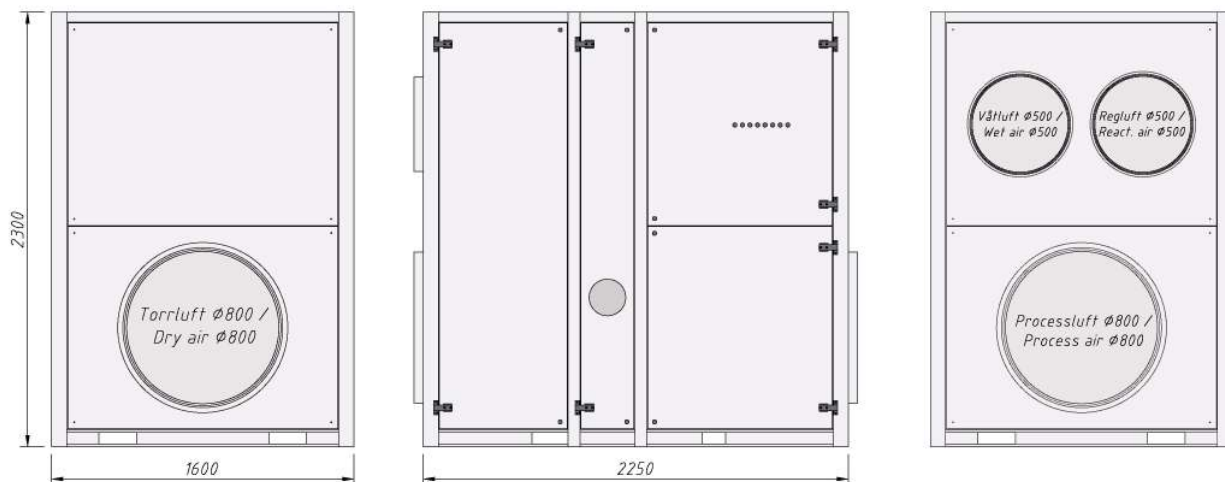

Calorex Heat Pumps Limited
 The Causeway, Maldon, Essex, CM9 5PU
 Tel: +44 (0)1621 856611 Fax: +44 (0)1621 850871
 Email: sales@calorex.com Web: www.calorex.com